



Overview

VILINK new generation HD SDI Video equipment: The VILINK DL820 is a fiber optic digital multiplexer that designed to transmit up to 8 channels of high quality uncompressed digital 3G HD SDI video signals and 10/100/1000M Ethernet Data over one single mode cable. It is a cost effective selection for transporting high quality SDI camera pictures and Ethernet network link to the remote location via long fiber optic cable. The DL1620 Series is compatible with all SMPTE rates: *SMPTE259M SDI from 143 to 360 Mbps, SMPTE344M 540Mbps, SMPTE292M HD-SDI 1.485 Gbps, SMPTE372M Dual Link HD-SDI 2,97 Gbps, SMPTE424M Dual Speed 3G-SDI 2.97 Gbps.* The 10/100/1000M Ethernet channel supports store and data forwarding with extremely low latency. It is high-performance, cost effective and flexible solutions for a wide range of applications in the field of LAN campus network.

The DL820 series offers a fully serial digital video encoding/decoding of real time high quality digital video providing adjustment free operation over a wide operational range. Using automatic gain control and state-of-the-art multiplexing, combining with CWDM technologies for distances from back-to-back to 50 Kilometers, our digital signaling offers superior receiver output stability, which is unaffected by changes in fiber path attenuation due to aging or splicing points. The extended temperature capability of the DL820 satisfies very critical applications requiring high quality video performance with high reliability. The DL820 series may be further maintained with the optional VILINK Plus+ (NMS) Network Management & (GUI) Interface Software Package. This permits any users the ability of monitoring the entire system for status alarms, such as loss of signal or optical signal, on any one of the system channels.

In addition, the DL820 can be optionally ordered with the 100 Ohms differential input/output BNC video interfaces for even higher video pictures quality, as well as pathological code for some broadcast video image requirements.

Applications include Broadcast Video Production, Video Editing, Unmanned Aircraft Vehicle Days & Nights Monitoring Systems, ITS Intelligent Traffic System, Metro & Railroad Monitoring System, Homeland Security, Utility Management, Premise Networks, Military Hardened applications or anything requiring HD quality video performance.

Features

- 8 Channels Uncompressed Digital Video Transmission
- One Single Mode Fiber With CWDM Technology
- Real Time High Quality 3G-HD-SDI Video
- Compatible with all SMPTE3G SDI Rates
 - SMPTE259M SDI from 143 to 360 Mbps, SMPTE344M 540Mbps,
 - SMPTE292M HD-SDI 1.485 Gbps, SMPTE372M Dual Link HD-SDI 2,97 Gbps,
 - SMPTE424M Dual Speed 3G-SDI 2.97 Gbps
- Pass Through Pathological Code
- 100 Ohms BNC Differential Input/Output Video signals Option
- Fully Compliant with IEEE802.3, IEEE802.3u, IEEE802.3ab standard
- Auto-detection of half/full duplex transfer mode
- Auto-negotiation of 10/100/1000 Mbps rate and Auto-MDI/MDIX for TX port
- AGC Single mode Transmission of 0 to 50 Km
- NMS (GUI) Monitor Package (Option)
- 90~240 VAC or +24 VDC, +28 VDC, -48 VDC Power Supplies
- NEMA Temperature

Applications

- Broadcasting Video Transmission
- High Quality HD-SDI Video Monitoring in Traffic Control Center
- METRO Security System
- Unmanned Aircraft Video System
- Oil & Gas Perimeter Intruder Detection
- Military Applications
- Premise Networks
- Any High Quality Video Requirement

Ordering Information


Model	Descriptions
DL820TST05	FO 8 Channels 3G HD SDI Video (Tx) and 10/100/1000M Ethernet Link, CWDM, SM ST, 50Km, 90~240 VAC
DL820RST05	FO 8 Channels 3G HD SDI Video (Rx) and 10/100/1000M Ethernet Link, CWDM, SM ST, 50Km, 90~240 VAC

*** Please Consult Factory for Additional Model Numbers***

System:	
Error Rate	1 in 10 ¹² or Better
Indicators	PWR, CH1 .. CH8
NMS (Option)	GUI Interface – RS-232 Ports
Optical:	
Transmitter	CWDM Lasers
Tx	1430nm~1610nm
Rx	1310nm
Receiver	PIN
Tx	1310nm
Rx	14300nm~1610nm
Power Budget	20 dB @ SM
Connector	ST, SC
Environment:	
Operating	-34 ^o C to +74 ^o C
Storage	-40 ^o C to + 95 ^o C
Humidity	98% Non-Condensing
Physical:	
Dimensions	19" x 10" x 1.75"
Weight	7 lbs
Power:	
AC	90~240 VAC @ 0.5Amp 50/60Hz
DC	+24 VDC, +28VDC, -48 VDC

3G HD-SDI Video Interface:	
Channel	8 x 3G HD-SDI
Format	SMPTE 259M, 292M and 424M
Speed	143Mps~540Mps, 1.485~2.97 Gbps
Full HD Revolution	1280 x 720P @ 50/60fps 1920 x 1080P @ 50/60fps
Signal Level	800mVp-p +/-10%
Connector	BNC
Impedance	75 Ohms
1620D (Option)	Dual Ports BNC
Input/Output (Option)	100 Ohms Diferential
10/100/1000M Ethernet Interface:	
Channel	1
Network Standard	IEEE802.3 10BaseT IEEE802.3u 100Base TX/FX IEEE802.3ab 1000Base TX IEEE802.3z FX
Support	Cut Through Frame and Data forwarding with low latency. Flow control half/full duplex operation.
Build-in Buffer	128 Kbytes
Auto Re-connect	512 bits collision-free packet
Support	VLAN, Tag VLAN, MTU, MPLS, PPPOE
Indicators	100M, Link, Act, SD, FXD, Pwr

Application

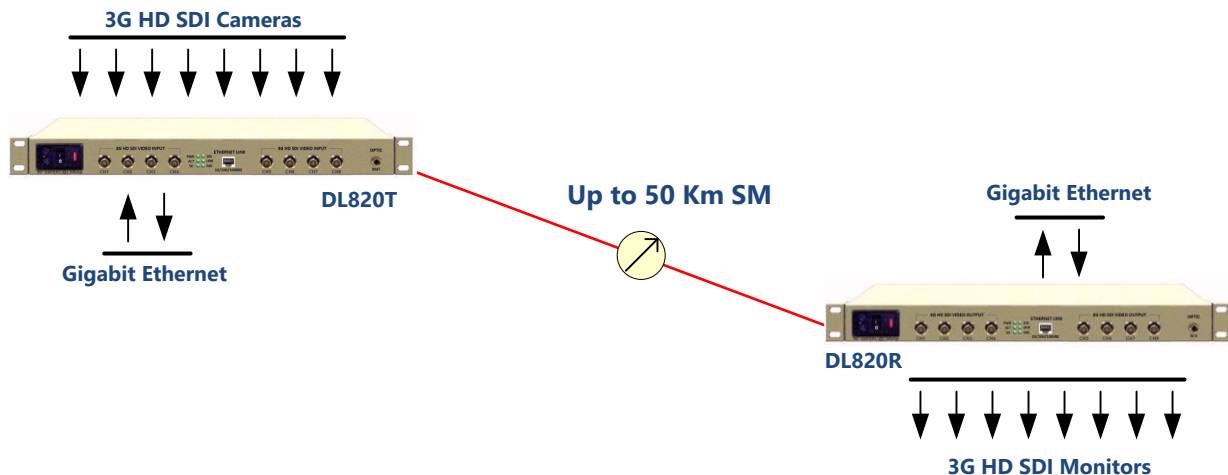

Typical DL820 Application